


SPad

Indoor / Outdoor Rental Solution



Stable



Magnetic
module



Running
stock



Cost-effective

► Various applications



Celebration/Promotional activity/Festivals/Weddings/Concert


Design and Maintenance



Edge protection
prevent pixel damage



7kg/panel light and
slim

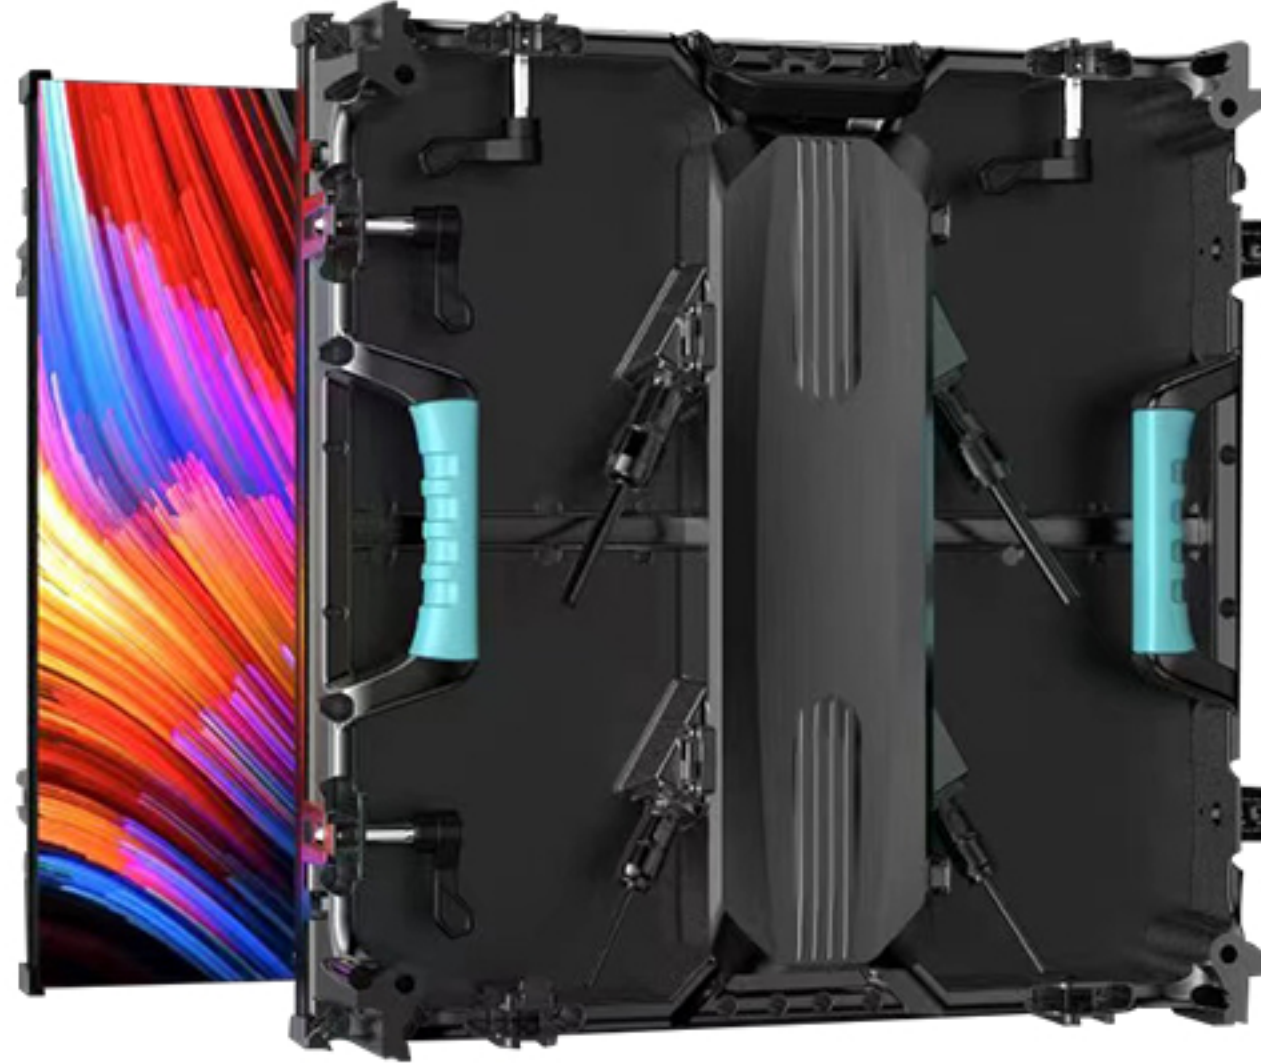

Compatible



stacking and Hanging

Stable Performance

More creative space and visual effects enhance the audience's immersion.



▶ Technical Specifications

Pixel		Outdoor P2.9	Outdoor P3.9	Outdoor P4.8	Indoor P2.9	Indoor P3.9	Indoor P4.8
Module	LED	SMD1415	SMD1921	SMD1921	SMD2020	SMD2020	SMD2020
	Size(mm)	250x250	250x250	250x250	250x250	250x250	250x250
	Resolution	84x84	64x64	52x52	84x84	64x64	52x52
	Density(dot/m2)	112,896	65,536	43,264	112896	65,536	43,264
Cabinet	Cabinet Size(mm)	500x500	500x500/500x1000	500x500/1000	500x500	500x500/1000	500x500/1000
	Resolution	168x168	128x128/128x256	104x104/104x208	168x168	128x128/128x256	104x104/104x208
	Material	Die-casting Aluminum					
	Module Quantity	/	/	4 / 8	4	4 / 8	4 / 8
	Weight	4 8.5KG	4/8 8.5KG/15KG	8.5KG/15KG	7.5KG	7.5KG/14KG	7.5KG/14KG
	Max. Power(w/panel)	260W	260W/520W	260W/520W	260W	130W /260W	130W/260W
	Ave. Power(w/panel)	130W	130W/260W	130W/260W	75W	75W/130W	75W/130W
Screen	Maintenance	Rear	Rear	Rear	Front/Rear	Front/Rear	Front/Rear
	InputM	110-220					
	Brightness	4,500	4,500	4,500	800-1000	800-1000	800-1000
	Driving Mode	Constant Drive					
	Way of Scan	16	16	13	27	16	13
	Screen Viewing Angle	140/140					
	Ingress Protection	IP65/IP54	IP65/IP54	IP65/IP54	IP43	IP43	IP43
	Grey Level	16bit					
	Refresh Frequency	>1920HZ					
	Operating Temperatru	-20°C-+60C					
	Operating Humidity	10%~90%					

Shenzhen SoStron Technology Co.,Ltd

Building D, Hongfa Science Park (Yuepeng Road), 2035 Songbai Road, Baoan District, Shenzhen City,China.

Contact us +86 755 2334 3844 info@sostron.com www.sostron.com